




2008 EBT Storm San Marino Open

Side to Side Ratios

22' 3.7 to 1

37' 2.9 to 1

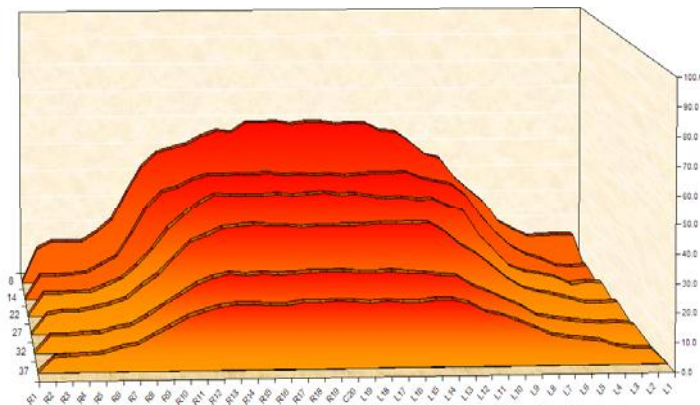

The 2D chart on the left shows select Lane Monitor tapes at key distances throughout the pattern.

We are using USBC Sport Bowling ratios which are calculated at 22' and 2' before the end of the pattern.

Side to Side ratios in the last half of the pattern can be an indicator of the difficulty of a pattern.

08' 2.8 to 1 27' 3.5 to 1

14' 3.4 to 1 32' 3.2 to 1

22' 3.7 to 1 37' 2.9 to 1


Generally, the lower the ratios down lane, the more difficult the pattern.

Front to Back Taper Ratios

Outside Taper 3.0 to 1

Inside Taper 2.7 to 1

The 3D chart below gives a visual of how the conditioner tapers off from the front end of the pattern to the back end of the pattern.

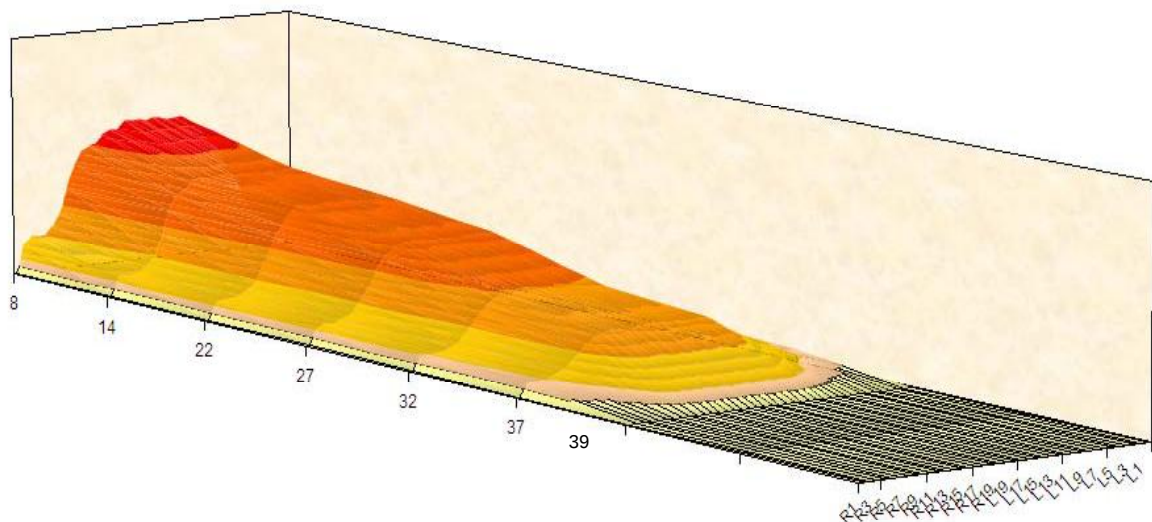



2008 EBT Storm San Marino Open

Kegel Sanction Technology™ Lane Machine Settings

Oil per Board (Pump Setting): 40 μ L

Pattern Distance: 39 feet

Total Volume: 22.32 mL



	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	3	14	111	0.0	3.9	3.9	4,440
2	6L	6R	1	14	29	3.9	5.8	1.9	1160
3	9L	8R	1	14	24	5.8	7.7	1.9	960
4	10L	9R	2	18	44	7.7	12.8	5.1	1760
5	12L	11R	3	18	54	12.8	20.4	7.6	2160
6	13L	12R	2	18	32	20.4	25.5	5.1	1280
7	2L	2R	0	18	0	25.5	29.0	3.5	0
8	2L	2R	0	22	0	29.0	34.0	5.0	0
9	2L	2R	0	26	0	34.0	39.0	5.0	0

Forward Oil Volume: 11.76 mL

Forward Boards Crossed: 294

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	0	30	0	39.0	29.0	-10.0	0
2	14L	13R	1	18	14	29.0	26.5	-2.5	560
3	11L	10R	3	18	60	26.5	18.9	-7.6	2400
4	8L	8R	2	18	50	18.9	13.8	-5.1	2000
5	6L	6R	1	14	29	13.8	11.9	-1.9	1160
6	2L	2R	3	14	111	11.9	6.0	-5.9	4440
7	2L	2R	0	14	0	6.0	0.0	-6.0	0

Reverse Oil Volume: 10.56 mL

Reverse Boards Crossed: 264



2008 EBT Storm San Marino Open

The charts on this page are generated by Kegel's KOSI lane machine software from the Sanction Technology lane machine program sheet.



The OVERHEAD CHART on the right shows where the conditioner is applied on both the forward and reverse screens. The gradient area is a calculation of how the conditioner might bleed off the buffer brush.

The COMPOSITE GRAPH below shows the total amount of conditioner applied to every board. A good way to think about this graph is to envision all the conditioner on the lane being pushed back to the foul line. Once all the conditioner is stacked up, this is what it would look like.

